




## B25 WELL-CONNECT PIPELINE

The B25 Well-Connect Pipeline is an approximately 1.27-mile pipeline that is part of Energy Transfer's natural gas gathering system in Beaver County. The 12-inch gathering pipeline will connect the B25 well pad to existing pipeline infrastructure in New Sewickley Township. The project is being permitted through the Pennsylvania Department of Environmental Protection and will meet or exceed regulations established by the U.S. Department of Transportation's Pipeline and Hazardous Materials Safety Administration (PHMSA).

### SAFETY

- All pipe will be buried with a minimum of 36 inches of cover or more depending on site-specific conditions.
- Construction of the pipeline will include visual and Non-Destructive Examination (NDE) of every weld that joins sections of pipe together.
- The pipeline will be tested with water at higher-than-normal operating pressure prior to being placed in service and regulation devices will be installed to prevent pressure from exceeding safe limits.
- The pipeline will be monitored 24 hours a day, 7 days a week by our gas control center via a computerized supervisory control and data acquisition (SCADA) system that tracks pressure, flow, temperature and other operating data through a series of field instruments to ensure safe operations. Our pipeline controllers maintain communications with field and station operations so all involved employees are kept abreast of current and future pipeline operations.
- The pipeline will be marked with visible line markers along the ROW and on either side of any road or river crossings. These markers will display an emergency contact number that is manned 24/7 by our gas control, as well as the operator name and type of product in the line.

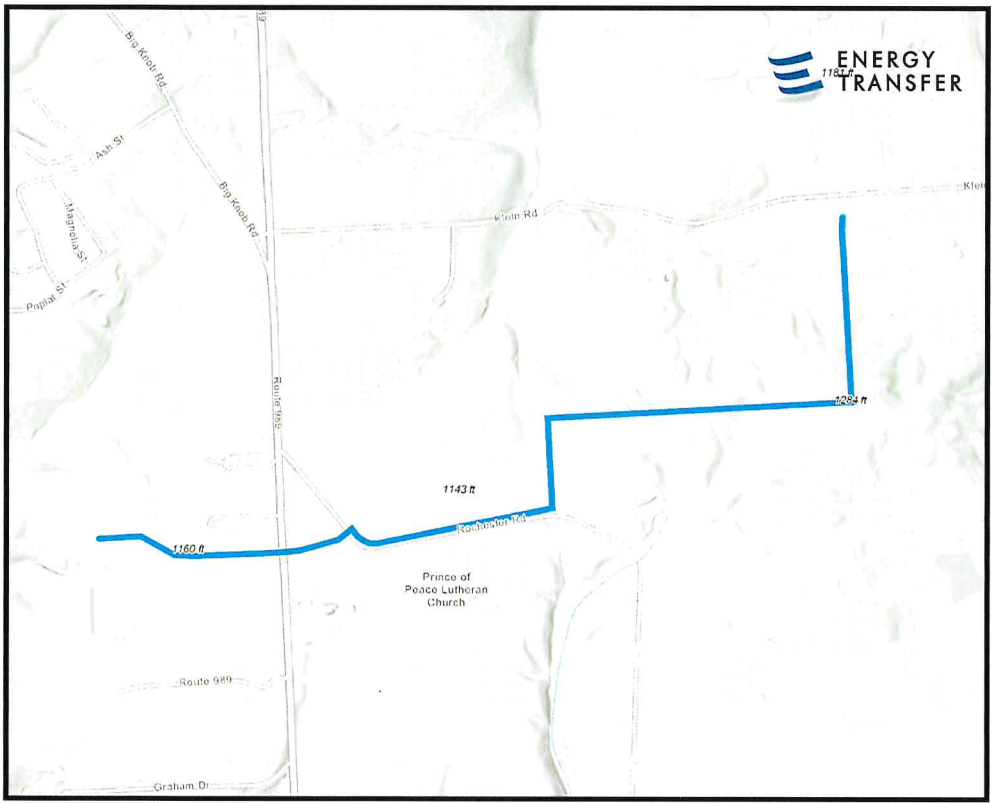

### Overall Project Map

B25 Well-Connect Pipeline, New Sewickley Township, Beaver County, PA



B25 WELL-CONNECT PIPELINE

### PROJECT TIMELINE

We anticipate construction to begin in early 2025, and it will take several months to complete.